

200000CPH 68 Heads LED Mounting Machine For Strip Light

Basic Information

Place of Origin: CHINA
Brand Name: ETON
Model Number: HT-T9
Minimum Order Quantity: 1 set

Price: EXW USD 95000/sets

• Packaging Details: Our packing is made of wooden box with

vacuum package, and we promise to deliver the goods within four weeks after payment.

• Delivery Time: 30 days after deposit

Payment Terms: T/T

Supply Ability: 50 sets per mouth



Product Specification

Name: Pick And Place Machine

• Feeders: 64 PCS

• Components: LED 3014/3020/3528/5050 Resistor

Capacitors

Nozzles: 64 PCS
Speed: 200000CPH
PCB Size: 250mm*any Length
Display: Touch Screen Monitor

• Power: 380V

Highlight: 200000CPH LED Mounting Machine,

68 Heads LED Mounting Machine, 6KW Led Lights Assembly Machine

Product Description

68 heads any length PCB size led mounting machine for flexible strip light Product presentation


Strong durability: T9 pick and palce machine, The quality of hardware equipment is guaranteed by certificate, the quality of dual motor electronic flying and guide rail and screw is guaranteed, which can support 24-hour operation.


High Speed: T9 LED mounting machine Applying the exclusive patented technology of group-based and group-based pasting, the pasting speed is 200000 CPH, 64 feeders station and 64 nozzles.T9 led mounting machine can automatically transmit online. And It can produce 2-4 kinds of materials at the same time, which greatly improves the efficiency.

Simple operation:T9 led mounting machine Windows 7 system can be used to switch the Chinese-English interface, usually 3 to 5 days training of operation is enough.

Technical parameter

| Technical parameter | | |
|---------------------|------------------------|---|
| HT-T9 | | |
| PCB | PCB length width | 250mm*any length |
| | PCB thickness | 0.5~1.5mm |
| | PCB clamping | Adjustable pressure pneumatic |
| | Mounting mode | Group to take and group to mount |
| O.S. | system | Windows 7 |
| | software | R&D independently |
| | display | LED monitor |
| | Input device | Keyboard , mouse |
| Vision system | No.of camera | 5 sets of imported camera |
| | | Vision alignment,mark correction |
| | Mounting precision | 0.02mm(repeat precision) |
| | Mounting height | <15mm |
| | Mounting speed | 100000~150000CPH |
| | Components | LED 3014/3020/3528/5050 and resistors, capacitors, bridge rectifiers. |
| | Components space | 0.2mm |
| | No.of feeders station | 64PCS |
| | No.of nozzles | 64PCS |
| | Power | 380AC 50HZ |
| | Power consumption | 6KW |
| | Conveyor transmission | Belt drive |
| | Transmission speed | >500mm/sec |
| | Transmission direction | Single (left to right or right or left) |
| | Transmission mode | Auto online drive |
| | Position mode | Optical |
| | Air pressure | >5.0kg /cm² |
| | Electrical control | Independent research and development by ETON |
| | Motion control card | Independent research and development by ETON |
| | module 1set | |
| | X,Y,X axis drive way | Servo motor control for X,Y,Z axis |
| | Feeding way | Electric feeder with double motor |

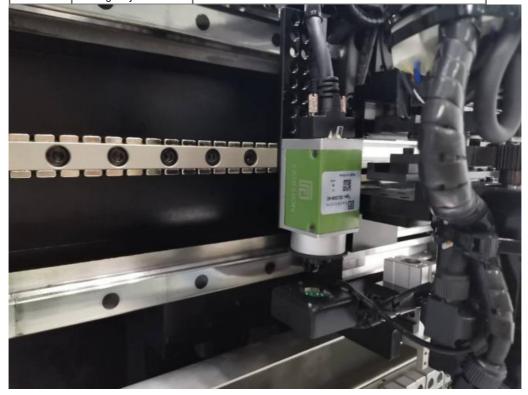

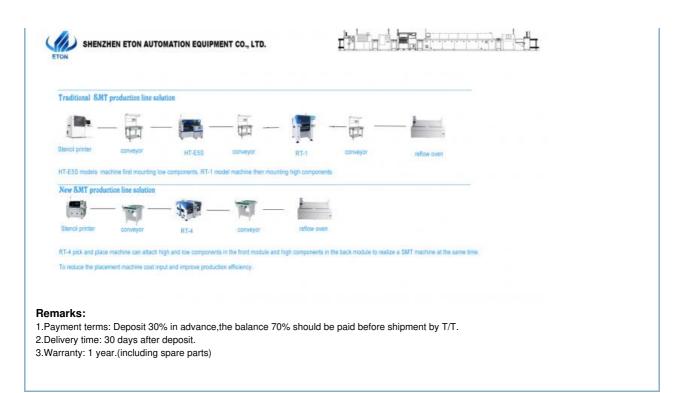



O086 13670197725 (Whatsapp/Wechat)

linda@eton-mounter.com

smtmountingmachine.com

HENGFENG INDUSTRIAL AREA, ZHOUSHI ROAD NO. 739, HEZHOU COMMUNITY, HANGCHENG STREET, BAOAN, SHENZHEN, CHINA