




SMT MACHINE single rail loader machine

Our Product Introduction

for more products please visit us on smtmountingmachine.com

Basic Information

- Place of Origin: CHINA
- Brand Name: ETON
- Certification: CCC,SIRA,CE
- Model Number: ET-UL390
- Minimum Order Quantity: 1PCS
- Packaging Details: WE USE VACUUM WOODEN BOC PACKAGE
- Delivery Time: 5-8 work days
- Payment Terms: L/C, T/T
- Supply Ability: 50PCS/Month

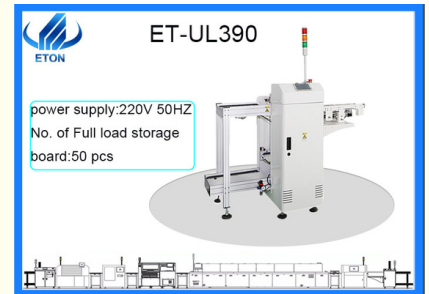

Product Specification

- MODEL: ET-UL390
- Warranty: 12 Months
- Name: Translation Conveyor
- Application: SMD Production Line, for SMT Machine
- Power Supply: AC220V 50Hz
- Condition: New, 100% Original, Brand-new
- Dimension: L2200*W920*H1200mm
- Maximum Size Of PCB: L530*W390mm
- No. Of Full Load Storage Board: 50 Pcs




Product Description

SMT MACHINE ET-UL390 loader machine

SPECIFICATION

Item:ET-UL390 loader machine
 Dimension:L2200*W920*H1200mm
 Frame:Special aluminum profile guide rail and special thousand bird type plastic chain
 Lift:120W Taiwan brake motor drive uses ball screw to make Magazine stepping up and down
 Structure:Pneumatic clamp structure
 0.9M long push plate Conveyor:1 set
 Maximum size of PCB:L530*W390
 Turnover box specifications:(L)535*(W)460*(H)565mm
 Direction:Left to right / right to left
 Lift platform pitch selection:10,20,30,40
 Closing function:Automatic
 Operation control panel:Display control true color touch screen
 power supply:220V 50HZ
 No. of Full load storage board:50 pcs

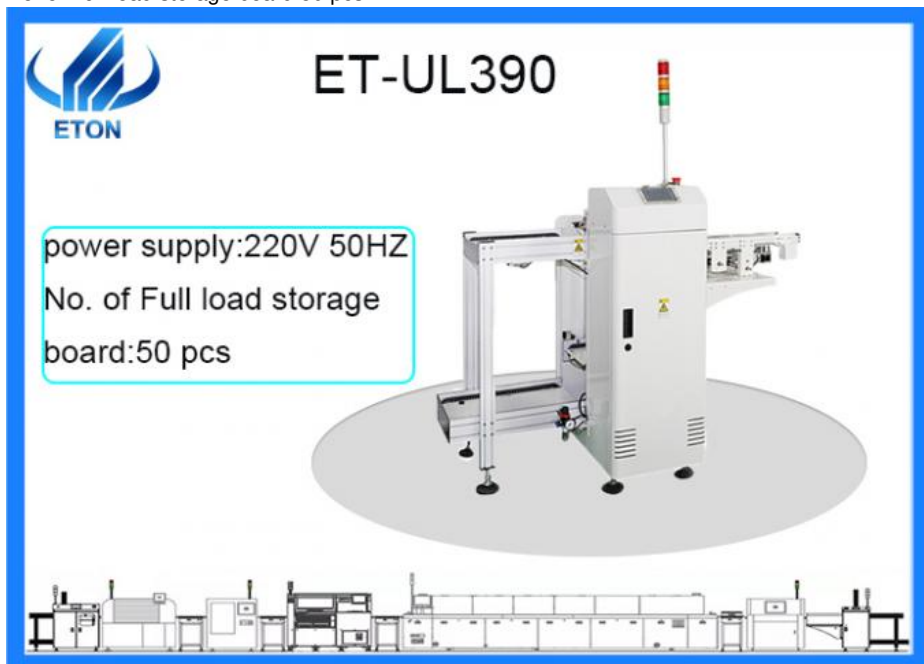

Automatic trigger features:

- 1.microcomputer control, stable and reliable work
- 2.Fuji Button or touch screen two control panels to choose, man-machine dialogue is convenient
- 3.a number of sound and light alarm functions
- 4.can use the standard material box, strong versatility, can place three material shelves
- 5.according to the PCB thickness, can set the material shelves up and down step
- 6.material machine built-in push plate mechanism
- 7.with automatic counting function,convenient for production statistics, with signal communication structure, can be connected with other machines on-line

Safe Operation Requirements:

1. Boot, please pay attention to work music, air pressure is correct.
- during white-light operation, do not press the emergency button unless the button is pressed in an emergency.
- it is prohibited for a staff member to be attached to a machine frequently or on a machine.
- lifting trolley, do not put your hand around the frame
- attention to adjust the plate spacing on the rack, wide easy to lead to fall off the board, tight easy to lead to card board

Pre-boot:

1. power on. Air Source. Turn on the power switch.
2. 1,2adjust the grade of the track, so that it is consistent with the grade of the PCR plate. Three send board step number area Out Board Point buy set
3. step set: press the button to select Pitch 12342.
- 4.out board adjustment:
 - 4.1manually adjust the push rod in the middle of the PCB to be produced.
 - 4.2make sure the machine can send the board smoothly
 - 4.3press the White Key
 - 4.4press the return key



0086 13670197725 (Whatsapp/Wechat)



linda@eton-mounter.com



smtmountingmachine.com

HENGFENG INDUSTRIAL AREA,ZHOUSHI ROAD NO. 739,HEZHOU COMMUNITY,HANGCHENG
STREET,BAOAN,SHENZHEN,CHINA