

# CCC SMT Machine High Speed 250K Capacity 68 Heads Pick And Place Machine

# **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 set
- Packaging Details: Packing in film package and foam cotton, and covering vacuum bag within sturdy wooden boxes.

CE,CCC,SIRA,ISO

China

ETON

HT-T9

- 30 working days • Delivery Time: • Payment Terms: T/T
- Supply Ability: 50 sets per month



# **Product Specification**

- Weight:
- Speed:
- . Local Service:
- Mounitng Height:
- Direction:
- Nozzles:
- Power:
- PCB Length Width:
- Placement Head:

- 1700kg 250000chips/h
- India, Egypt, Vietnam

• Highlight:

- 5mm Right To Left / Left To Right
- 68PCS
- 380AC 50 HZ
- 250mm\*any Length
- 68 Heads
  - 250K capacity pick and place machine, CCC SMT Machine, 68 heads pick and place machine



## More Images



for more products please visit us on smtmountingmachine.com

## CCC SMT high speed 250K capacity 68 heads pick and place machine

#### Description

Features

Producing with Producing 4 types materials at the same time with high capacity, available for 5M, 50M or any length of Flexible strip and Roll to roll.


Dual arm four modul, 17 nozzles for each mounting part, part A or part B can be mounted separately or synchronously. Calibration automatically, high precision, available for RGB. Exclusive patent technology: Group to pick and group to mount.

#### IPC9850 Capacity: 200000~250000 CPH

Patent number: ZL 2011 2 0237740.9/ ZL 2011 2 0334606.0/ ZL 2012 20178869.1/ ZL 2012 2 0415505.0/ZL 2012 20415044.7/ZL 2012 2 0415356.8/ ZL 2012 2 0415061.0

Technical parameter

Model	HT-T9
Dimension	
Length	3100mm
Width	2300mm
Height	1550mm
Total Weight	1700kg
PCB	
PCB Length Width	250mm*any length
PCB Thickness	0.5-1.5mm
PCB Clamping	Adjustable pressure pneumatic
Mounting Mode	Group to take and group to mount
O.S.	
System	Windows7
Software	R&D independently
Display	Touch screen monitor
Input Device	Keyboard, Mouse
Vision System	
No. of Camera	5 PCS ( Digital camera)
	Vision alignment, MARK correction
Mounting Precision	±0.02mm
Mounting Height	≦5mm
Mounting Speed	200000~250000 CPH
Components	LED 3014/ 3020/ 3528/ 5050 and capacitors, resistors, bridge rectifiers, etc.
Components Speed	0.5mm
No. of Feeders Station	68 PCS
No. of nozzles	68 PCS
Power	380AC 50 HZ
Power Consumption	6kw
Operating Environment	23°C±3°C
Conveyor transmission	Max Length :1000 mm
Electrical control	Independent research and development by ETON
Motion control card module 1 set	Independent research and development by ETON
X,Y,Z Axis Drive way	High-end magnetic linear motor+ servo motor
Feeding way	Electric feeder with double motor

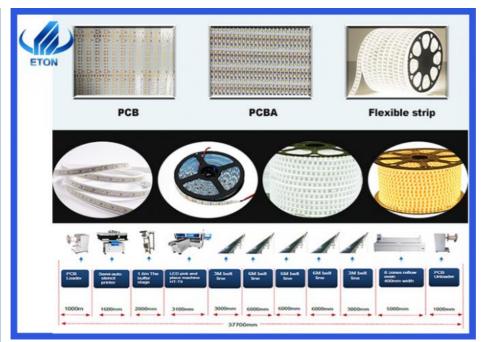

### **Our Exhibitions**

As an experienced company of trading SMT pick and place machine with more than 30 countries and regions aboard, Eton has participated in many exhibitions of foreign countries, such as India Mumbai Exhibition, India Delhi Exhibition, Egypt Exhibition, Turkey Exhibition, Pakistan Exhibition, etc. And also we have took part in our domestic exhibition, like Guangzhou Guangya Exhibition, Shanghai Munich Exhibition, Chongqing LED light Exhibition, etc.



#### Packages

Our package step is follow the blowing:

STEP 1: Film packaging to prevent the dust and water;

STEP 2: Packing in a foam cotton stretch a film to protect the outside of the machine;

STEP 3: Vacuum paper package and moisture proof bag, to keep dry during the transportation;

STEP 4: Equip with sturdy wooden boxes to ensure the safety of the machine, then transportation by trucks to the specified port.

Delivery: by sea, air, land transport.

